


### B14

### Dimensions Dimensioni

#### 63A÷90L

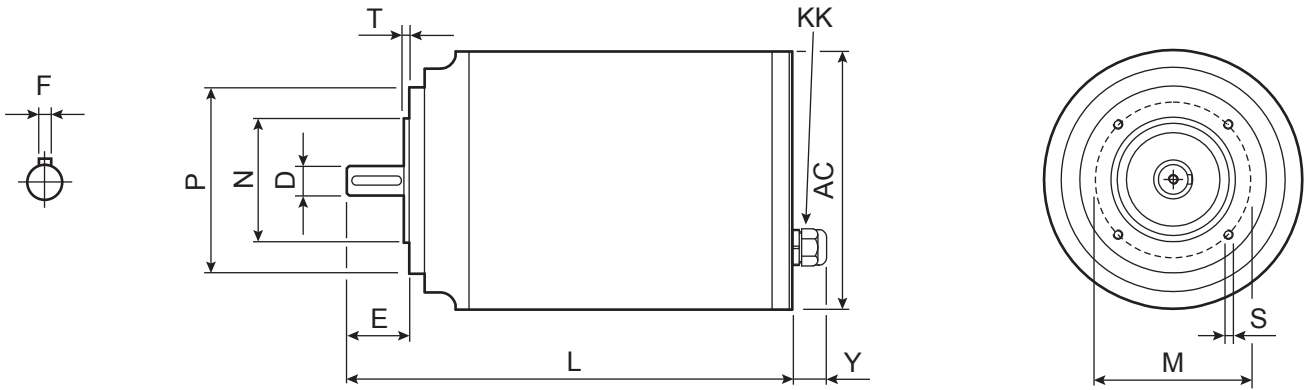

Sizes: IEC 63..90L, 4 poles  
 Voltage: Δ/Y 230/400V - 50Hz  
 Protection: I.C.I.F - IP69k - IC410  
 Efficiency: IE3 (IEC60034-30, IEC60034-2-1, P<sub>n</sub> ≥ 0,75kW)  
 Duty cycle: S1  
 Other features: INVERTER DUTY, HYGIENIC, PTO PROTECTION INCLUDED

#### 4 poles B14

Motor	kW	IE3	rpm (min <sup>-1</sup> )	Nm	A (400V)	COS (φ)	D	F	E	L	AC	Y	N	M	P	T	S	Kg	KK
63A	0.12		1440	0.80	0.44	0.57	11 j6	4	23	229	131	24	60 j6	75	90	2.5	4xM5	6.9	M16x1.5 ø4-8 Tightening: 2 Nm
63B	0.18			1.19	0.58	0.62	M4											8.0	
71A	0.25		1440	1.66	0.72	0.64	14 j6	5	30	266	131	27	70 j6	85	105	2.5	4xM6	9.4	M20x1.5 ø6-12 Tightening: 3 Nm
71B	0.37			2.45	1.10	M5	11.1												
80A	0.55		1460	3.60	1.50	0.67	19 j6	6	40	280	166		80 j6	100	120	3	4xM6	15.3	M25x1.5 ø13-18 Tightening: 4 Nm
80B	0.75			4.91	2.10	M6	18.0												
90S	1.1		1460	7.20	2.90	0.70	24 j6	8	50	345	166	30	95 j6	115	140	3	4xM8	22.7	M25x1.5 ø13-18 Tightening: 4 Nm
90L	1.5			9.81	4.00	M8	28.4												