


B14


Dimensions

Dimensioni

63A÷90L (Totally enclosed, not ventilated)

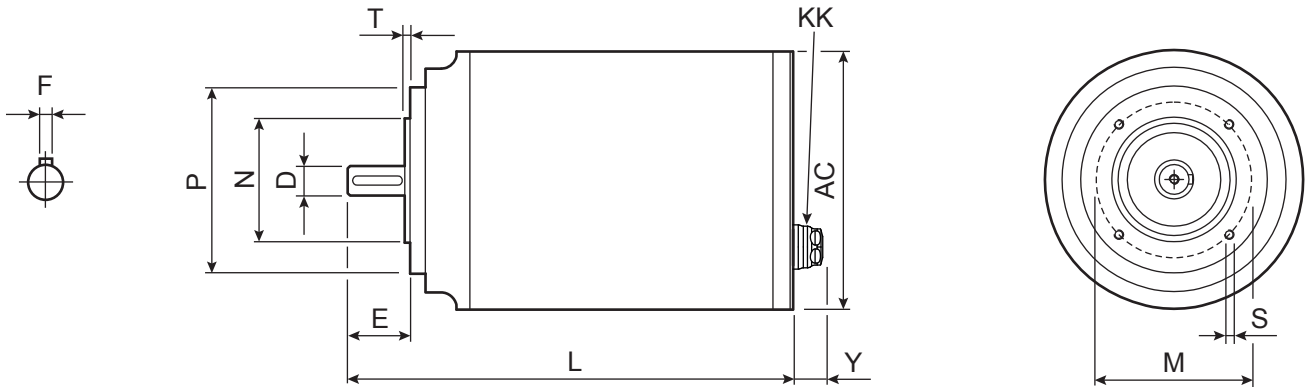

100LA (Ventilated)

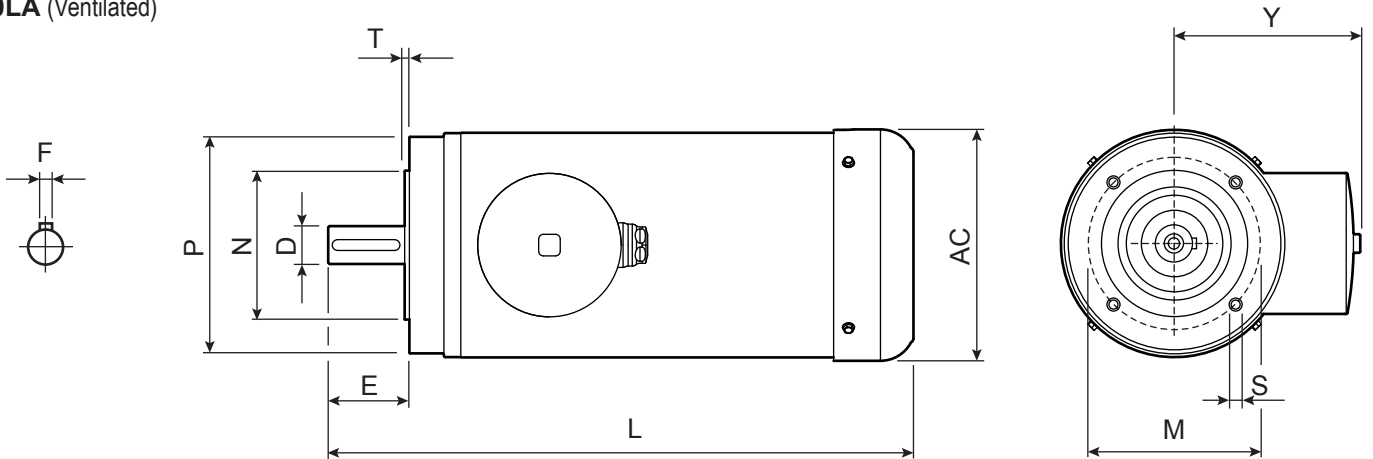

4 poles B14

Motor	kW	IE3	rpm (min ⁻¹)	Nm	A (400V)	COS (φ)	D	F	E	L	AC	Y	N	M	P	T	S	Kg	KK
63A	0.12		1440	0.80	0.44	0.57	11 j6	4	23	229	131	24	60 j6	75	90	2.5	4xM5	8.7	M16x1.5 ø7.5-10 Tightening: 15 Nm
63B	0.18			1.19	0.58	0.62	M4												
71A	0.25		1440	1.66	0.72	0.64	14 j6	5	30	266	131	27	70 j6	85	105	2.5	4xM6	11.6	M20x1.5 ø11-13.5
71B	0.37			2.45	1.10	M5	13.5												
80A	0.55		1460	3.60	1.50	0.67	19 j6	6	40	280	166		80 j6	100	120	3	4xM6	19.0	Tightening: 18 Nm
80B	0.75			4.91	2.10	M6	22.0												
90S	1.1		1460	7.20	2.90	0.70	24 j6	8	50	345	166	30	95 j6	115	140	3	4xM8	27.0	M25x1.5 ø11-13.5 Tightening: 35 Nm
90L	1.5			9.81	4.00	M8	33.0												
100LA	2.2		1440	14.6	4.80	0.79	28 j6	8	60	432.5	171	140	110 j6	130	160	3.5	4xM8	34.0	M20x1.5 ø11-13.5 Tightening: 18 Nm

Ventilated