

# Aluminum one step gearboxes

A modular and compact product

3

## Alloy housing

Is vacuum impregnated (MIL-STD 276) for protection and sealing. No secondary finish required but readily accepts paint

## Flange

Fully modular to IEC and Compact integrated motor. NEMA C flange

## Gears

Hardened and ground gears.

## Removable inspection cover

Allows periodic inspection of gearing during routine maintenance

## Output shaft

With well proportioned bearings

## Feet


Removable feet.

## Single-piece aluminum alloy housing

Combines light weight with high tensile strength. Precision machined for alignment of bearings and gearing

Ideal for use as first step with wormgearboxes.

Lubricated for life with synthetic oil with operative range from -15° to +130°C

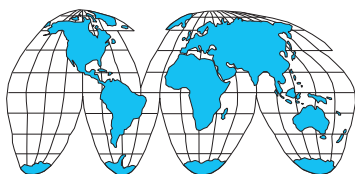

World wide sales network.

