Lubrication for mounting position

Lubrificatione per posizione di montaggio

Suggested mounting position are as follows

Le posizioni di montaggio suggerite sono le seguenti

With high input speeds above 2000 rpm Oil breather plugs are suggested as internal pressure can rise. In some critical cases the oil quantity that are indicated in our website on the lubrication pages, may need to reduced. So please contact us.

Con velocità di ingresso elevate superiori a 2000 giri/min si consiglia l'uso di tappi di sfiato olio poiché la pressione interna può aumentare. In alcuni casi critici potrebbe essere necessario ridurre la quantità di olio indicata nel nostro sito relativa alla lubrificazione. Quindi per favore contattaci.

WORM GEARBOXES

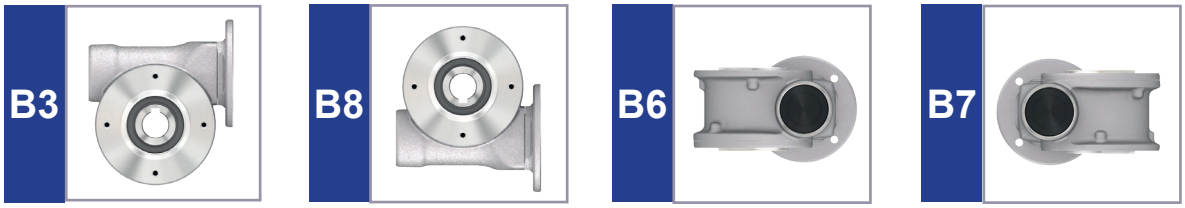

COAXIAL GEARBOXES

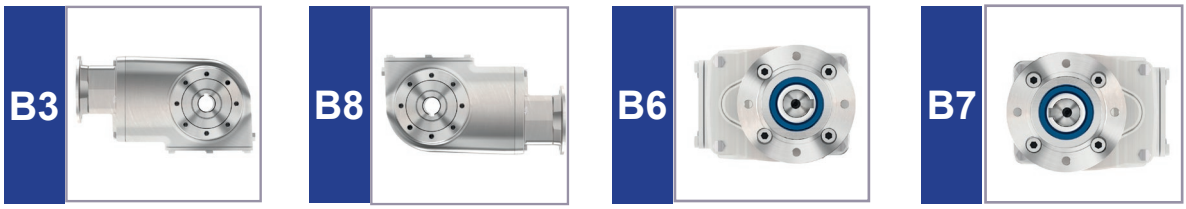

SUGGESTED POSITION

Vertical positions are critical

Le posizioni verticali sono critiche

These position required 2Z or 2RS bearings.
Queste posizioni richiedono l'utilizzo di cuscinetti 2Z o 2RS.

V6/H6
MOST CRITICAL

Continuous duty with high start and stop is not suggested. In this condition the correct functioning of lower oil seal becomes critical.
Il servizio continuo con avvii e arresti frequenti non è consigliato.
In questa condizione il corretto funzionamento dell'anello di tenuta inferiore diventa critico.

WORM GEARBOXES

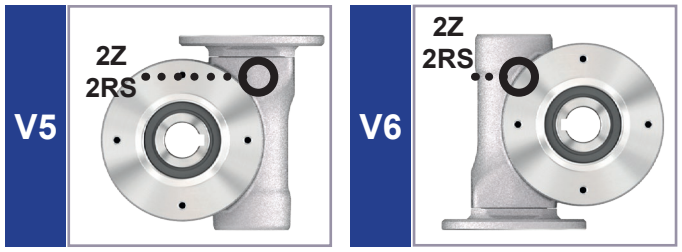

HELICAL BEVEL GEARBOXES

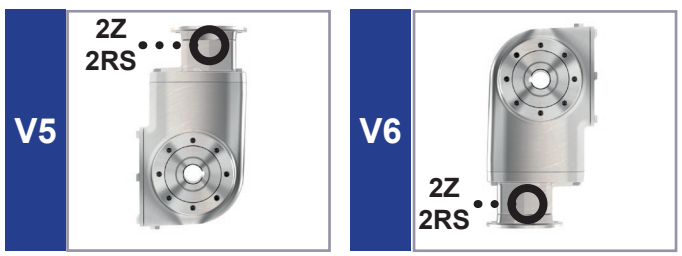

MOST CRITICAL V6